






VLC-70

MAIN FEATURES

- Up to 70 cartons per minute
- Ideal for frequent changeover, with large carton variance
- Racetrack configuration, allows up to 4 operators (manual operation)
- Small Footprint
- Automatic loading available
- Mechanically linked carton folding operation
- Ergonomic design

VLC-70 VERTICAL LINEAR CARTONER

• Adaptable • Compact • Ergonomic

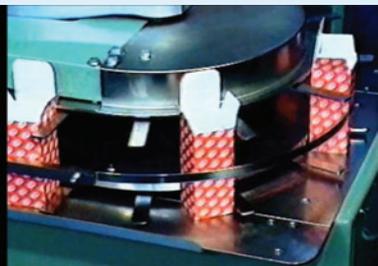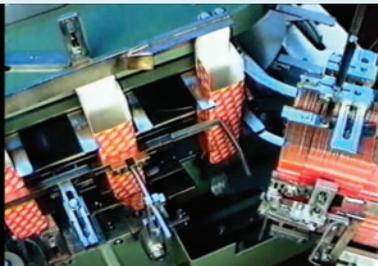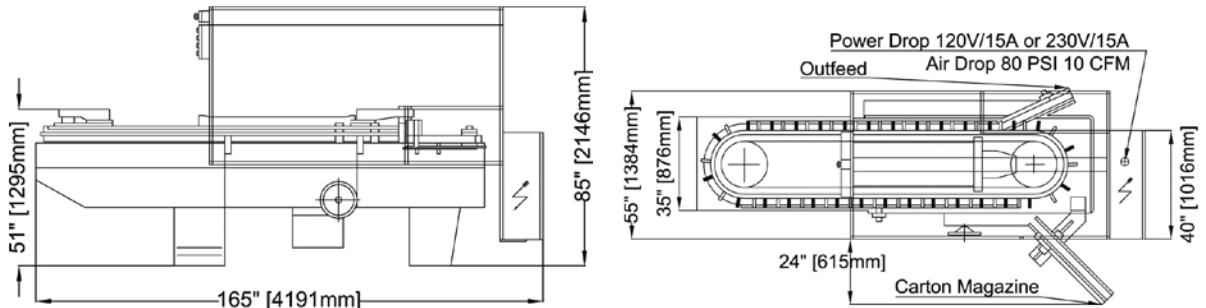

SPECIFICATIONS:

DRIVE:	Mechanical Cam Drive
SPEED:	Up to 70 cartons per minute
PRODUCT SIZE RANGE:	Per Project Specification
CARTON SIZE RANGE:	Length: min - 3/4" (20mm) max - 4.5" (115mm) Width: min - 1/2" (15mm) max - 2.75" (70mm) Height: min - 2" (50mm) max - 7.5" (190mm)
CARTON FEED:	Mechanical Carton Feed, no vacuum
MODE:	- Racetrack intermittent motion - Operating stations allowing, direct or field installation of options including: <ul style="list-style-type: none"> • Leaflet insertion • Barcode reader • Missing product detection • Printer • Open flap detection - High speed in-feed systems are designed to meet specific product loading - Hot melt system or fold and tuck (airplane or reverse)
WEIGHT:	Approximately 1200 kg / 2600 lbs
MAGAZINE CAPACITY:	40" holding 850 cartons
FRAME:	Epoxy Coated
CONSTRUCTION:	Anodized Aluminum/ stainless steel and fully accessible polycarbonate Interlocked guarding with adjustable feet or optional casters
INSTALLATION REQUIREMENTS:	Power: 240 VAC with 3 phase @ 15 amps. Air: 90 PSI, 1 cfm
VALIDATION:	product present verification, Standard



1111 Flint Road, Unit 29, Toronto
Ontario, Canada, M3J 3C7
Tel: (416) 663 7071
www.nuspark.com

Distributed by